

Boro 3.3 100ml



Iran Head Office

1st Kushesh St., Imam Khomeini Blvd. Semnan Ind. Zone, Semnan, Iran Postal Code: 35351-64351 P.O.Box: 35145-161

Tel: +98 23 3365 2203 Fax: +98 23 3365 2235

Website: www.ccpc.ir Email: info@ccpc.ir Instagram: @ccpciran

Italy Office

Registered Office: Ottavio Caccia St. No. 17/A - 37136 Verona (VR) Italy

Trading and Logistics Office: 1 Maggio St. No. 5 - 20873 Cavenago Brianza (MB) Italy Tel: +39 02 9533978 Fax: +39 02 95019624 Website: www.ccpc.it

















ECHA
EUROPEAN CHEMICALS AGENCY
Registration, Evaluation,
Authorisation & Restriction

Email: info@ccpc.it





CCPC

CHLORAN CHEMICAL PRODUCTION COMPANY

100



http://www.ccpc.ir info@ccpc.ir ITALY/SERBIA/IRAN/AZERBAIJAN/TURKEY



CCPC® at a glance:

Founded in 1983 by M. Hamoun, as an international producer and supplier of chlor-alkali products, Chloran Chemical Production Company (CCPC®) has improved the people's daily lives for nearly four decades.

The water we drink, the preserved foods we eat, the bleaching agents we use, the pool we swim in and even the paper we write on, all depend on chlor-alkali universe and contribute to the health and safety of the people everywhere. Driven by its modern and innovative technology, CCPC® plays a vital role in supplying the required building blocks for these necessary reliable solutions by serving a wide range of industries.

CCPC® main products include:

- ✓ Liquid Chlorine (Cl₂) Min 99.5%
- √ Caustic Soda Flakes (NaOH) Min 98%
- ✓ Liquid Caustic Soda (NaOH) 48 52%
- ✓ Calcium Chloride (CaCl₂) Min 96%
- ✓ Liquid Calcium Chloride (CaCl₂) Min 36%
- ✓ Calcium Hypochlorite (Ca(ClO)₂) Min 65%
- √ Calcium Hypochlorite (Ca(ClO)₂) 60 ± 3%
- √ Hydrochloric Acid (HCl) 31 33%
- ✓ Sodium Hypochlorite (NaClO) .. 15 19%



Manouchehr Hamoun (Center) and colleagues building the future, 1983



throughout our production and supply chain.

for its products to enter the international markets and as a result has turned into one of the biggest

As one of the most qualified producers of chlorine and its derivatives which offers its pro-

regional exporters of chlor-alkali products. Believing in a knowledge-based approach as the most



Manouchehr Hamoun welcoming guests at chlor-alkali symposium, 2014

important pillar in increasing business competitiveness and development and relying on our priceless human resources and scientific principles, we are also pursuing the development of chlor-alkali science along with the continuous innovation and improvement and navigating a pioneer organization in all its aspects in accordance with our strategic plans.

Founder's message:

With more than 30 years of brilliant local and international ex-

perience in chlor-alkali industry, we as Chloran Chemical Production

Company (CCPC®) are a leading private commercial production firm,

aiming for the impelementation and development of our strategic thinking in

chlor-alkali world, based on the sustainable and balanced development approaches

Manouchehr Hamoun Chairman of the Board





















R 501 C















A white granular solid with a purity of 65 to 70%, calcium hypochlorite is commonly used to sanitize public swimming pools and disinfect drinking water. CCPC® calcium hypochlorite is highly soluble in water and is produced via an exclusive award-winning patented process.

- Applications: ✓ Water and wastewater treatment ✓ Swimming pool disinfection
- Standard Packaging: 25 Kg P.E. square drums (to be carried on shrink wrapped pallets)

Details : 36 x 8888 = 3 >> 22 x 3 = 4


CCPC® Calcium Hypochlorite Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Active Chlorine _ %w/w	Min 65	Min 65	ISIRI 7098 & 3352
Sodium Chloride _ %w/w	Max 20	Max 10	ISIRI 7098
Solubility as Active Chlorine_%w/w	Min 45.5	Min 50	ISIRI 7098
Insoluble in Water _ %w/w	Max 6	Max 6	ISIRI 7098
Amount of Water _ %w/w	16	2 - 8	ISIRI 7098
Residue on 425 Micrometer Sieve _%w/w	Min 75	Min 75	ISIRI 7098 & 3352
Residue on 2 mm Sieve _%w/w	Max 20	Max 20	ISIRI 7098 & 3352
Cd _ mg/Kg of Active Chlorine	Max 5	Nil	ISIRI 7098
Pb _ mg/Kg of Active Chlorine	Max 15	Nil	ISIRI 7098
Ni _ mg/Kg of Active Chlorine	Max 8	Max 8	ISIRI 7098
Cr _ mg/Kg of Active Chlorine	Max 15	Max 12	ISIRI 7098
As _ mg/Kg of Active Chlorine	Max 5	Max 2	ISIRI 7098
Hg _ mg/Kg of Active Chlorine	Max 5	Max 1	ISIRI 7098
Sb _ mg/Kg of Active Chlorine	Max 15	Max 5	ISIRI 7098
Se _ mg/Kg of Active Chlorine	Max 20	Max 5	ISIRI 7098
Fe _ %w/w	Max 0.5	Max 0.15	ISIRI 3352
Appearance	White, Granulated	ОК	ISIRI 7098







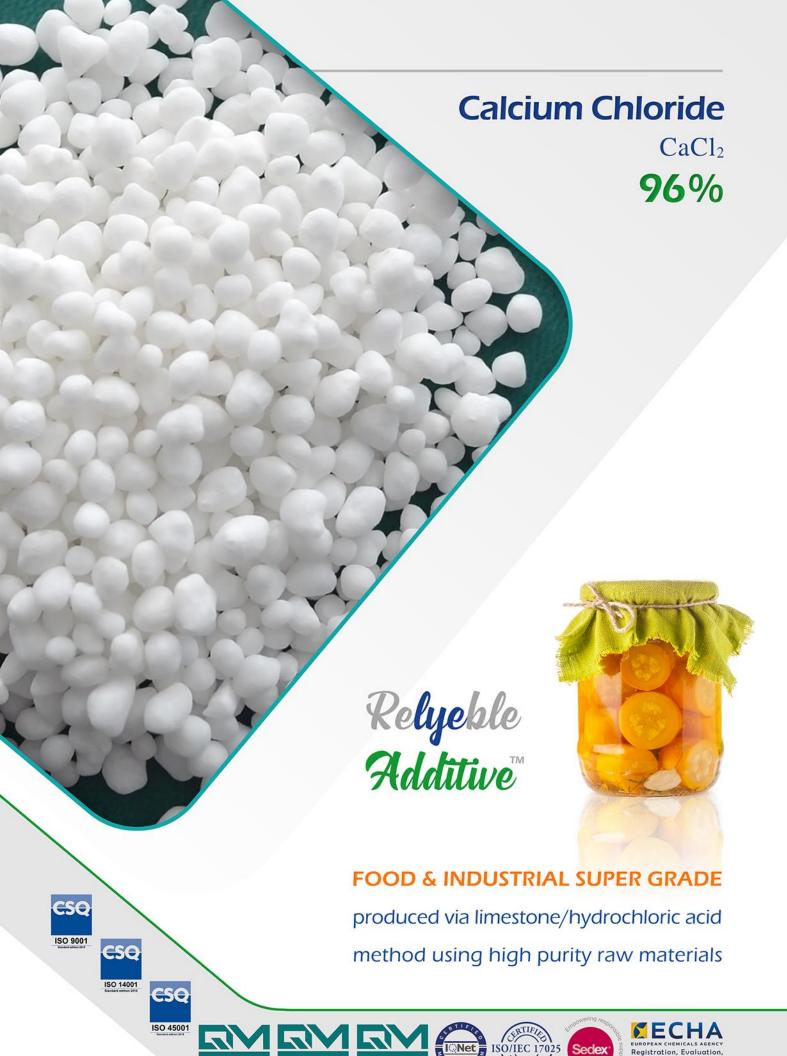

From de-icing the driveways to drilling the oil fields and even processing the foods, calcium chloride plays an essential role in our daily life. CCPC® calcium chloride is a white granular solid, free of heavy metals and other impurities being produced through the process of high quality limestone and extra pure hydrochloric acid and is available in food and industrial grades.

- Applications: √ Food Processing √ Desiccating ✓ Water Treatment ✓ Oil-well Drilling ✓ Metallurgy
- Standard Packaging: available in 1000 Kg 2-ply p.p. bulk bags or 25 Kg 2-ply p.p. bags (to be carried on shrink wrapped pallets or inside bulk bags)

Option 1 (Bulk) : 1000 kg = >>> 25 x





Option 2 (Pallet) : **40** x





Option 3 (Jumbo) : **40** x





CCPC® Calcium Chloride Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Purity of Calcium Chloride (CaCl ₂) _ %w/w (anhydrous)	Min 94	Min 96	ISIRI 18193
Fluoride(F ⁻) _ %w/w	Max 0.004	Max 0.003	ISIRI 13571
рН	4.5 - 9.5	8 - 9.5	ISIRI 13571
Mg and Alkaline salts (anhydrous) _ %w/w	Max 4	Max 0.2	ISIRI 13571
Total Alkalinity (as NaCl)_%w/w Relative to active substance CaCl ₂	Max 6	Max 1	ISIRI 18193
Total magnesium (as MgCl ₂)_%w/w Relative to active substance CaCl ₂	Max 0.5	Max 0.2	ISIRI 18193
Ca(OH) ₂ _%w/w Relative to active substance CaCl ₂	Max 0.2	Max 0.07	ISIRI 18193
Heavy Metals as Pb _ mg/Kg	Max 0.002	Max 0.002	ISIRI 13571
Appearance	White, Granulated 1 - 4 mm	ОК	ISIRI 13571









Also known as sodium hydroxide, caustic soda is a white solid and highly alkaline compound with a wide variety of applications. CCPC® caustic soda flake is being produced through highend membrane electrolysis by which the final products would be free of heavy metals and as a result available in high quality food and industrial super grades.

- Applications: ✓ Alumina refinery ✓ Pulp & paper industry √ Soaps & detergents ✓ Oil & gas industry ✓ Mining & drilling ✓ Food industry ✓ Chemical production
- Standard Packaging: 25 Kg 2-ply p.p. bags (to be carried on shrink wrapped pallets or inside 2-ply jumbo bags)

Option 1 (Pallet) : $50 \times |8803| = |8803|$

CCPC® Caustic Soda Flakes Technical Data Sheet:

Option 2 (Jumbo) : 50 x | 8803 | = | 8803

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Purity of Sodium Hydroxide _ %w/w	Min 98	Min 98	ISIRI 364
Carbonate as Na ₂ CO ₃ _ %w/w	Max 1	Max 0.5	ISIRI 364
Chloride as NaCl _ %w/w	Max 0.06	Max 0.02	ISIRI 364
Sulfate as Na ₂ SO ₄ _ %w/w	Max 0.01	Max 0.005	ISIRI 364
Silicate as SiO ₂ _ %w/w	Max 0.02	Max 0.005	ISIRI 364
Fe _ mg/Kg	Max 30	Max 15	ISIRI 364
Insoluble in Water _ %w/w	Max 0.1	0.00	ISIRI 364
Aluminum as Al ₂ O ₃ mg/Kg	Max 20	Max 20	ISIRI 364
Heavy Metals as Pb_ mg/Kg	Max 20	Max 20	ISIRI 364
Mercury as Hg _ mg/Kg	Max 0.2	Max 0.15	ISIRI 364
Arsenic as As ₂ O ₃ mg/Kg	Max 2	Max 0.5	ISIRI 364
Appearance	White Color, Free of Visible Impurities	ОК	ISIRI 364









In liquid form sodium hydroxide is a colourless, odourless and non-flammable solution with a vast application. CCPC® high-end electrolysis production method guarantees the final product to be free of heavy metals and any other impurities with a concentration of 48 to 52%.

- Applications: ✓ Alumina refinery ✓ Pulp & paper industry ✓ Chemical production ✓ Oil & gas industry
 ✓ Mining & drilling
 ✓ Soaps & detergents production
- Standard Packaging: available in intermediate bulk container (IBC) and bulk (to be carried by tanker trailer)

Option 1 (IBC) : 1 x = 1.2 Mt >> 20 x = =





Option 2 (Bulk depending on the capacity of tanker truck):

CCPC® Liquid Caustic Soda Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Purity of Sodium Hydroxide _ %w/w	Min 48	Min 48	ISIRI 364
Carbonate as Na ₂ CO ₃ _ %w/w	Max 0.5	Max 0.3	ISIRI 364
Chloride as NaCl _ %w/w	Max 0.03	Max 0.015	ISIRI 364
Sulfate as Na ₂ SO ₄ _ %w/w	Max 0.007	Max 0.004	ISIRI 364
Silicate as SiO ₂ _ %w/w	Max 0.01	Max 0.005	ISIRI 364
Fe _ mg/Kg	Max 10	Max 7	ISIRI 364
Insoluble in Water _ %w/w	Max 0.05	0.00	ISIRI 364
Aluminum as Al ₂ O ₃ _ mg/Kg	Max 10	Max 10	ISIRI 364
Heavy Metals as Pb_ mg/Kg	Max 10	Max 10	ISIRI 364
Hg _ mg/Kg	Max 0.1	Max 0.1	ISIRI 364
Arsenic as As ₂ O ₃ _mg/Kg	Max 1	Max 1	ISIRI 364
Appearance	Colorless, Clear, Free of Sediment & Suspended Particles	ОК	ISIRI 364





















Commonly known as bleach, sodium hypochlorite is produced as an aqueous solution by combining chlorine gas and sodium hydroxide. CCPC® sodium hypochlorite is available in a range of 15 to 19% concentration and is being produced by innovative rapid batch method.

- Applications: ✓ Bleaching ✓ Textile industry ✓ Water and wastewater treatment
- Standard Packaging: available in 220 litre drums (to be carried on pallet), intermediate bulk container (IBC) and bulk (to be carried by tanker trailer)

Option 1 (Drum):

= 1.06 Mt >>





= 1.2 Mt



Option 3 (Bulk) note: 19% product should be only carried as bulk.

CCPC® Sodium Hypochlorite Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Active Chlorine _ % w/v *	Min 12.5	15 - 16	ISIRI 2361
Sodium Chlorate _ % w/w	Max 0.7	Max 0.25	ISIRI 2361
Free Sodium Carbonate as Na ₂ CO _{3 _} % w/v	Max 1	Max 0.6	ISIRI 2361
Density at 20°C _ g/cm ³	Min 1.20	Min 1.20	ISIRI 2361
Free Alkaline as NaOH _ % w/w *	Min 0.5 & Max1.2	Min 0.5 & Max 1.2	ISIRI 2361 & 8394
Sodium Bromat _ g/Kg of Active Cl ₂	Max 2.5	Max 2.5	ISIRI 8394
As _ mg/Kg of Active Chlorine	Max 1	Max 0.5	ISIRI 8394
Cd _ mg/Kg of Active Chlorin	Max 2.5	Nil	ISIRI 8394
Cr _ mg/Kg of Active Chlorine	Max 2.5	Nil	ISIRI 8394
Pb _ mg/Kg of Active Chlorine	Max 15	Nil	ISIRI 8394
Sb _ mg/Kg of Active Chlorine	Max 20	Max 1	ISIRI 8394
Se _ mg/Kg of Active Chlorine	Max 20	Max 1	ISIRI 8394
Co _ µg/g	Max 0.5	Nil	ISIRI 2361
Cu _ µg/g	Max 0.5	Nil	ISIRI 2361
Fe _ µg/g	Max 3	Max 1	ISIRI 2361
Ni _ μg/g	Max 0.5	Nil	ISIRI 2361
Hg _ µg/g	Max 0.1	Max 0.1	ISIRI 2361
Appearance	Yellow, Clear, Free of Sediment and SuspendedParticles	ОК	ISIRI 8394 & 2361

^{*} The amount of active chlorine and free alkaline (NaOH) would be adjustable upon customers' request.









A highly corrosive liquid, hydrochloric acid plays an important role in the manufacturing of a wide range of consumer products. CCPC® hydrochloric acid is a product of direct synthesis of pure chlorine and hydrogen, both of which are formed during on site electrolysis process.

- Applications: ✓ Metal pickling ✓ Chemical synthesis ✓ pH control ✓ Oil fields
- Standard Packaging: available in 220 litre drums (to be carried on pallet), intermediate

bulk container (IBC) and bulk (to be carried by tanker trailer) Option 1 (Drum):

Option 2 (IBC) : 1 x = 1 Mt

Option 3 (Bulk depending on the capacity of tanker truck):

CCPC® Hydrochloric Acid Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Concentration _ %w/w of HCI	Min 30	30 - 33	ISIRI 209
Density at 20°C _ g/mL	Min 1.15	Min 1.15	ISIRI 209
Sulfate as SO_4^{2-} ppm	Max 100	Max 50	ISIRI 209
Heavy Metal as Pb _ ppm	Max 2	Max 2	ISIRI 209
Free Chlorine and Bromine as CI _ ppm	Max 20	Max 18 (controllable to 0 ppm)	ISIRI 209
Iron as Fe _ ppm	Max 5	Max 0.5	ISIRI 209
Sulfite as SO ₃ ²⁻ _ ppm	Max 50	Max 20	ISIRI 209
Arsenic as As _ ppm	Max 1	Max 1	ISIRI 209
Mercury as Hg _ ppm	Max 1	Max 0.25	ISIRI 209
Copper as Cu _ ppm	Max 1	Max 0.1	ISIRI 209
Lead as Pb _ ppm	Max 1	Max 1	ISIRI 209
Appearance	Clear, Free of Sediment and Suspended Particles	ОК	ISIRI 209







Hydrochl

Acid















A yellowish green toxic gas with strong odor, chlorine is an extremely reactive element and a strong oxidising agent used in a vast range of production processes. CCPC® liquid chlorine is produced by liquefaction of the chlorine gas that is formed through the electrolysis process.

Applications:

- ✓ Coatings and paints ✓ Pulp & paper industry ✓ Water and wastewater treatment ✓ Polymer industry √ Chemical synthesis
- Standard Packaging: available in 45 Kg and 800 Kg rechargeable cylinders

Shipping Details:



] - 800 кg » 14 × 👖 - 🛶









CCPC® Chlorine Gas Technical Data Sheet:

Physical & Chemical Propertie	ISIRI Compliant Range	CCPC Product Range	Standard Reference
Purity _ %v/v	Min 99.5	Min 99.5	ISIRI 18408
Gas Impurities _ %v/v	Max 0.5	Max 0.3	ISIRI 18408
Moisture _ %w/w	Max 0.015	Max 0.01	ISIRI 18408
Non-Volatile Matters _ %w/w	Max 0.015	Max 0.007	ISIRI 18408

Cylinder Testing & Descaling:

Complete depletion, chemical cleaning and descaling, internal and external inspection of the cylinders, flanges and valves check, weighing and applying thickness measurement, performing hydrostatic and pneumatic tests, and if necessary, additional ultrasonic tests are the standard procedure of cylinders quality control done by CCPC® QC department in accordance with the international standards.









